

TUBU

High-temp Ambient High Bay F9H


Features

- Hi-temp ambient up to 65°C
- High Output LED's, up to 160lm/W
- CRI>70
- Driver High PF>0.9, low THD, Flicker free
- Environmentally friendly, no mercury, No UV, No IR
- 60°/90°/120° beam angle
- Energy Efficiency Grade: A+++
- Quick Start instant 100% luminous flux
- 5 Year Warranty
- Certificate: CE, RoHS,
- Body: Aluminium alloy
- Stainless steel screws
- Options: 1-10V, DALI Dimming,
- 60°/90°/120° beam angle



Applications




- Sports lighting
- Warehouse
- Storage
- Logistic

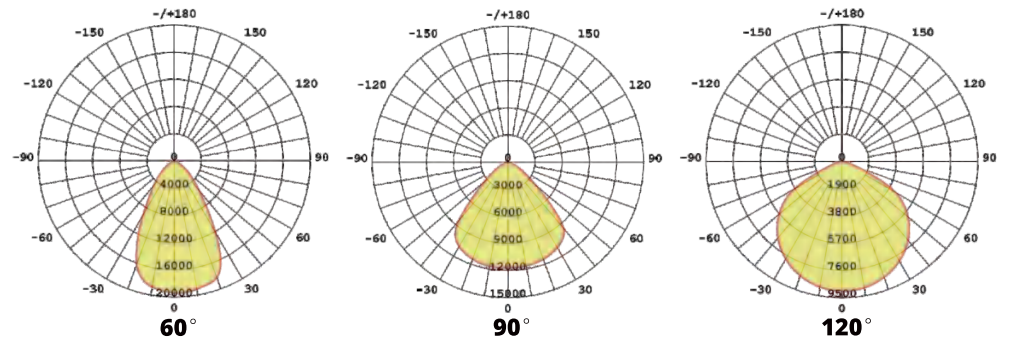



Hi-temp ambient up to 65°C

- 60°/90°/120°
- High Efficiency 160lm/W

TUBU

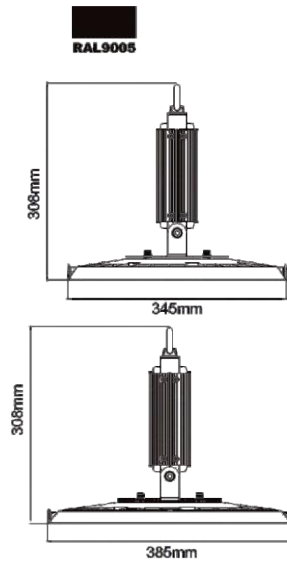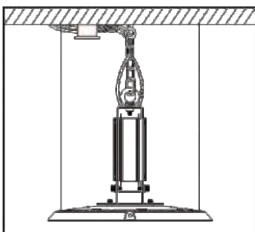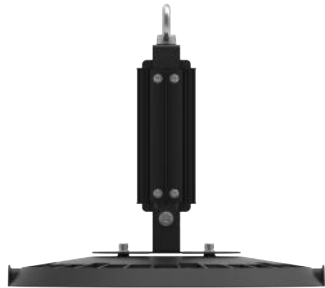

High-temp Ambient High Bay F9H

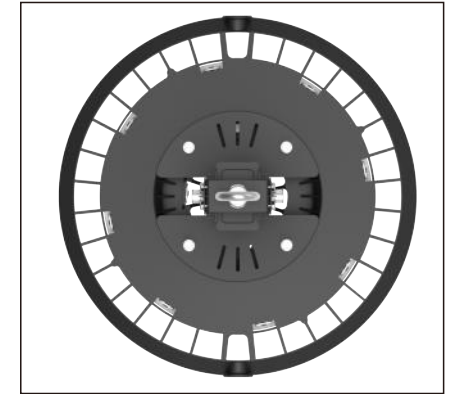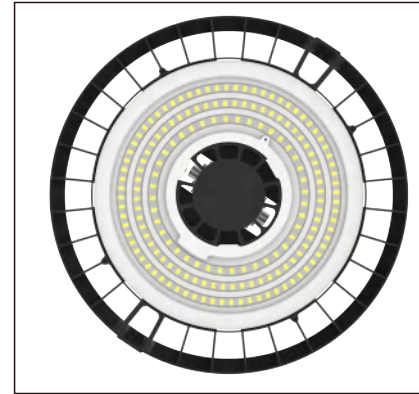

Specifications

| | | | |
|------------------------|---------------|-------------------------|--------------|
| Product Code | | TBF9-100W-H | TBF9-150W-H |
| Power | | 100W | 150W |
| Input Voltage | | 200-240VAC(50/60Hz) | |
| Input Current | | 0.45A@230VAC | 0.68A@230VAC |
| PF | | >0.90 | |
| Dimming | BOKE | 0-10V/Dali Dimming | |
| CCT | | 3000K/4000K/5000K/6000K | |
| Ra > 80 5000K | Luminous Flux | 15000Lm±5% | 22500Lm±5% |
| | Efficiency | 150Lm/W±5% | |
| Ra > 70 5000K | Luminous Flux | 16000Lm±5% | 24000Lm±5% |
| | Efficiency | 160Lm/W±5% | |
| LED Brand | | 3030 | |
| Beam Angle | | 60°/90°/120° | |
| Operation Temp | | -40 C ~+65 C | |
| Storage Temp | | -40 C ~+85 C | |
| Life Span | | Ta 65 C L70>54000Hours | |
| IP Class | | IP65 | |
| IK Class | | IK10 | |
| Certificate | | CE, RoHs | |
| Lamp Body Color | | Black (RAL9005) | |
| Product Size (mm) | | 345*345*308 | 385*385*308 |
| Net weight (kg) ±0.1 | | 3.35 | 3.7 |
| Product Size (mm) | | 384*152*390 | 424*150*430 |
| Gross weight (kg) ±0.1 | | 4.1 | 4.5 |
| Installation mode | | Hook Mount | |