


TUBU

IP66 LED Batten Light L10-K Series


Features

- IP66, IK10
- Stainless steel clips & safety rope
- 5x2.5mm² through wiring
- Boke isolated flicker free driver
- 130lm/W system efficiency, CRI80(Honglitronic brand leds)
- PC cover + PC base(V2)
- Self-test emergency with LiFePO4 battery option
- Microwave sensor options(wireless control)
- Ambient Temperatures: -20 to +40 degrees
- 5 Year Warranty, CE, RoHs, ENEC, RCM Certified
- Options: 1-10V, Motion Sensor, DALI, Emergency
- Surface Mount or Suspension mount

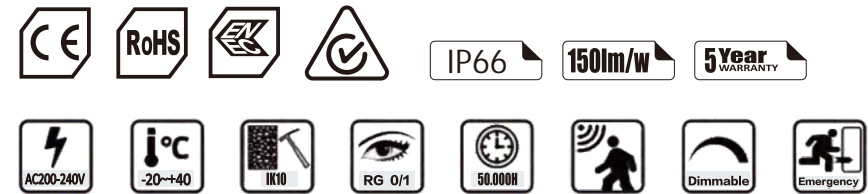

Applications

- Workshops
- Supermarket
- Warehouse
- Storage
- School Lighting
- Car parking Lighting



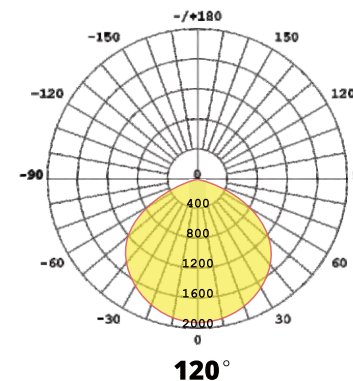


IP66 LED Batten Light L10-K Series



- 120°
- 18W/36W/50W
- Options: 1-10V, DALI, MW Sensor, 3h Emergency Battery Backup

TUBU

18W/36W/50W

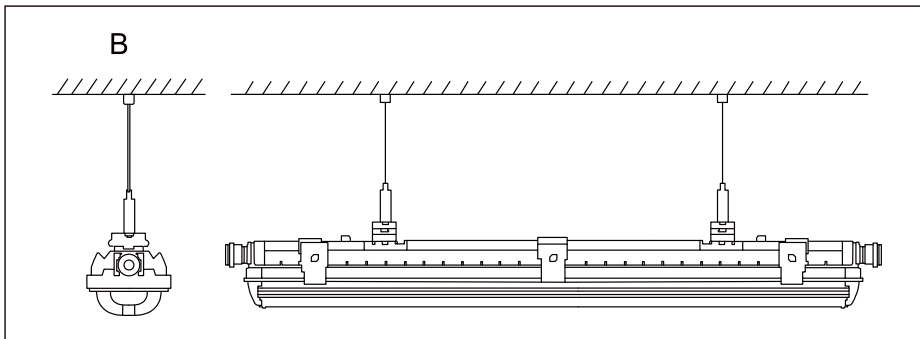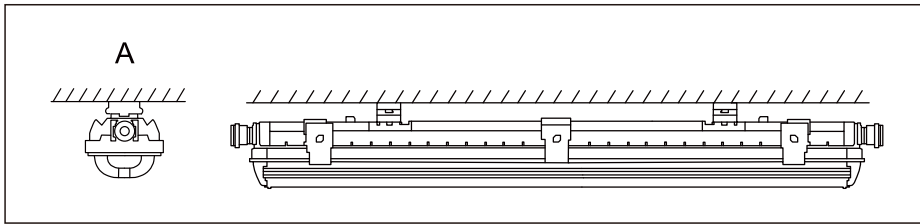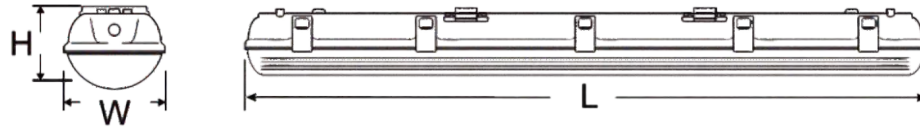

IP66 LED Batten Light L10-K Series

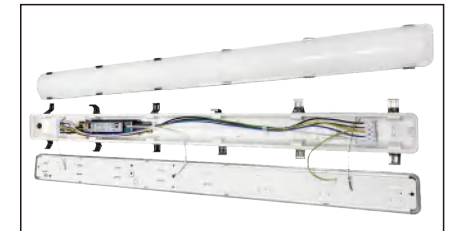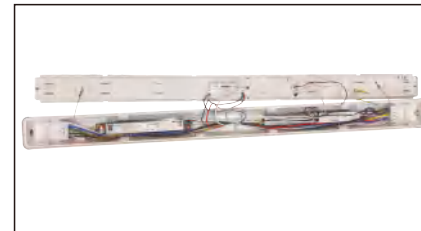

Specifications

Product Code	TBL10A2F-18W-K	TBL10A4F-36W-K	TBL10A5F-50W-K
Power	18W	36W	50W
Input Voltage	200-240VAC/100-277VAC (50/60HZ)		
PF	0.9A@220VAC		
Dimming Option	0-10V/Dali, MW Sensor, Emergency		
CCT	3000K / 4000K / 5000K / 5700K		
Ra > 80	Luminous Flux	2340Lm±5%	4680Lm±5%
	Efficiency	130Lm/W±5%	
Ra > 80	Luminous Flux	2700Lm±5%	5400Lm±5%
	Efficiency	150Lm/W±5%	
LED Brand	Lumileds/Hongli 2835		
Beam Angle	120°		
Operation Temp	-20 C ~+40 C		
Storage Temp	-20 C ~+60 C		
Life Span	Ta 40 C L70>54000Hours		
IP Class	IP66		
IK Class	IK08		
Certificate	RCM, ENEC, CE, RoHs		
Lamp Body Color	PC Base(Grey) + PC Cover(Milky)		
Product Size (mm)	Ø600*95*83	Ø1200*95*83	Ø1500*95*83
Packing Size (mm)	690*335*300	1290*335*210	1590*335*210
Quantity/carton	9PCS	6PCS	6PCS
Gross weight (kg) ±0.3	13	16	19
Installation mode	Surface Mount/Suspension Mount		