

TUBU

Mesh Type LED Tubular Light


Features

- IP67 & IP69K
- PMMA IK08 / PC IK10
- Against water pressure of 100bar(1450psi) and temperature of 80 °C
- System efficiency up to 50lm/W
- High CRI >80
- Environmentally friendly, no mercury, No UV, No IR
- Wide beam angle 80°
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHS Certified
- Surface Mount or Suspended



Applications

- Car parking Lighting
- School Lighting
- Workshops
- Supermarket
- Warehouse
- Storage




Mesh Type LED Tubular Light




- PC IK10 / PMMA IK08
- Anti-glare design, perfect for indoor use
- Chemical resistant
- 50lm/W
- Against water pressure of 100bar(1450psi) and temperature of 80 °C

TUBU


20W/40W/50W/60W

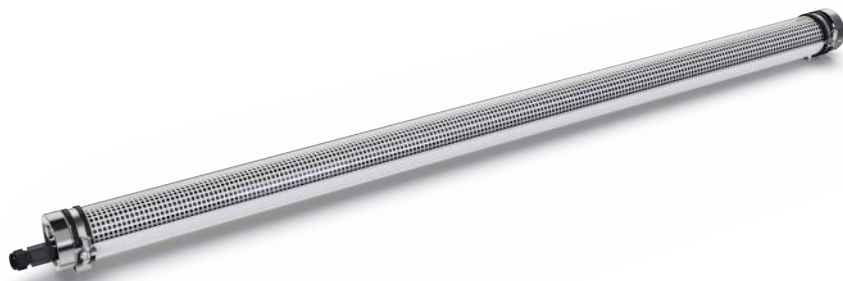

Single installation

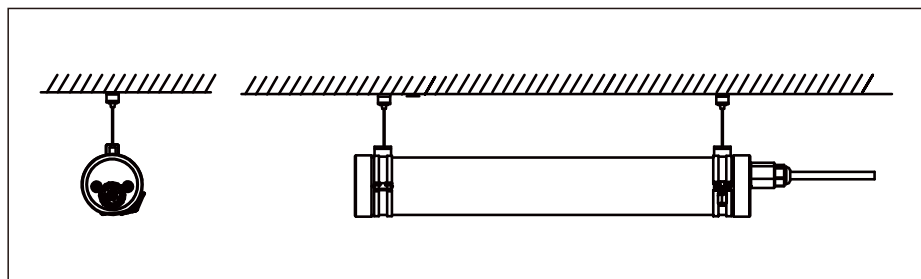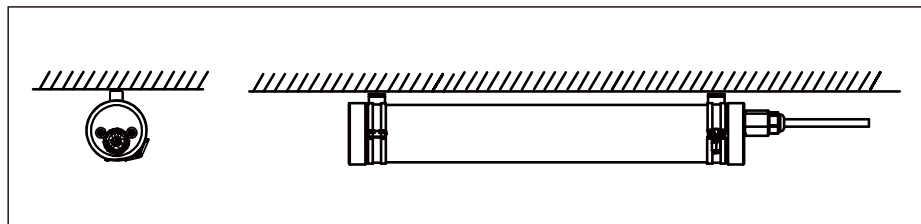

Mesh Type LED Tubular Light

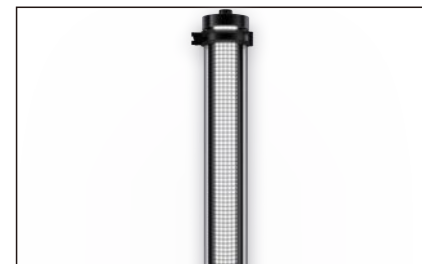

Specifications

Product Code		TBL92F-20W-M	TBL94F-40W-M	TBL95F-50W-M	TBL95F-60W-M
Power		20W	40W	50W	60W
Input Voltage		200-240VAC/100-277VAC (50/60HZ)			
Input Current		0.09A@220VAC	0.19A@220VAC	0.23A@220VAC	0.28A@220VAC
PF		0.90@220VAC			
Dimming Option		0-10V/Dali			
CCT		3000K/4000K/5000K/6000K			
Ra > 80	Luminous Flux	1000Lm±5%	2000Lm±5%	2500Lm±5%	3000Lm±5%
	Efficiency	50Lm/W±5%			
LED Brand		Lumileds/Hongli			
Beam Angle		80°			
Operation Temp		-20 °C ~+40 °C			
Storage Temp		-20 °C ~+60 °C			
Life Span		Ta 40 °C L70>54000Hours			
IP Class		IP67 & IP69K			
IK Class		PMMA IK08 / PC IK10			
Certificate		CE, RoHs, CB, IK10, IP69K, ENEC			
Lamp Body Color		Milky PC / PMMA Housing & 304 / 316 Stainless Steel End Caps			
Product Size (mm)		Ø 75*552	Ø 75*1152	Ø 75*1452	Ø 75*1452
Packing Size (mm)		730*260*260	1330*260*180	1630*260*180	1630*260*180
Quantity/carton		9PCS	6PCS	6PCS	6PCS
Gross weight (kg) ±0.3		12	15	23	23
Installation mode		Surface Mount/Suspension Mount			