


# TUBU

## UGR<19 LED Linear High Bay Light G2 DXG


### Features

- High Output LED's, up to 130lm/W, LM80 certified light source
- High CRI >80
- Brand driver, TUV UL CE certificate, PF>0.96, THD<12
- Flicker free
- Environmentally friendly, no mercury, No UV, No IR
- IP65, indoor, outdoor using
- Energy Efficiency Grade: A+++
- Quick Start instant 100% luminous flux
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHS, SAA, C-Tick, D-Certification, IP65 report
- Options: 1-10V Dimming, MW Sensor
- Hanging mount accessories included

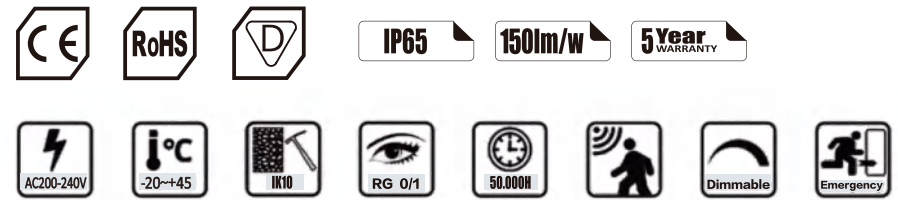

### Applications

- Bus station
- Warehouse
- Airport
- Sports Halls
- Badminton court
- Workshops
- Factories
- Exhibition Halls
- Supermarket

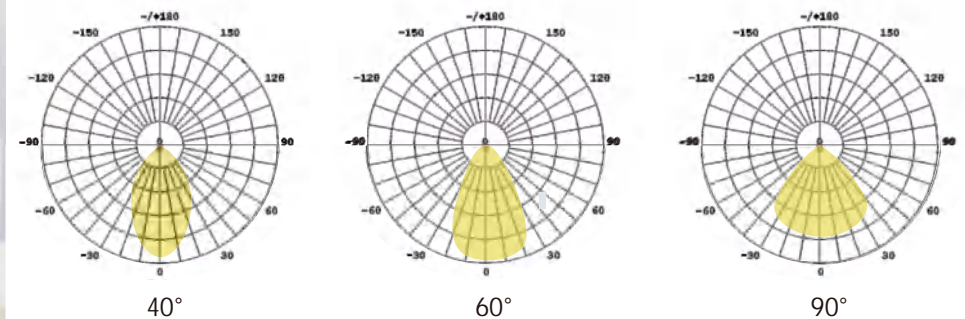

### UGR<19 LED Linear High Bay Light G2 DXG




- Up to 130lm/W
- 80W/150W/200W
- 40°/60°/90°
- Sensor & Emergency Battery Backup Option

# TUBU

80W/150W/200W



## UGR<19 LED Linear High Bay Light G2 DXG

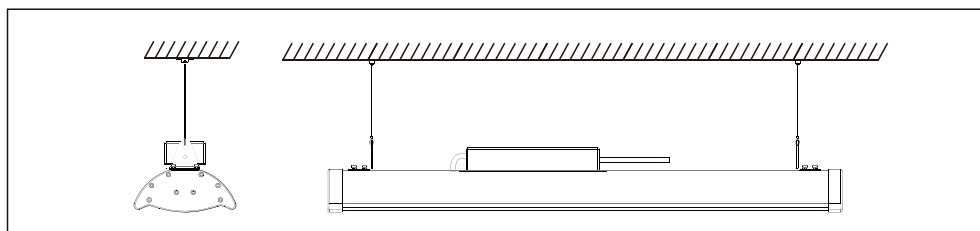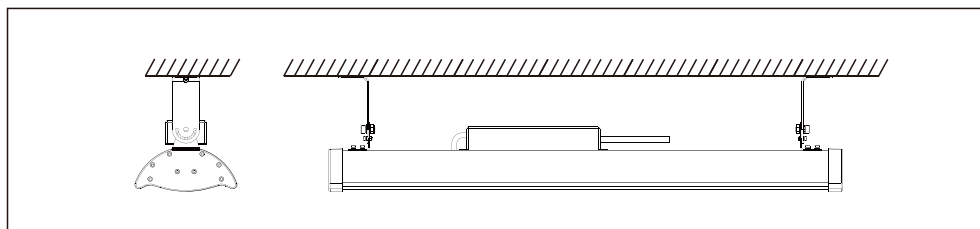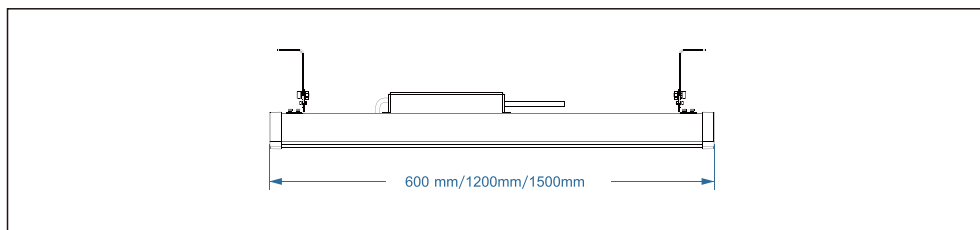

### Specifications

Product Code	MG-HT150WF-DXG	MG-HT200WF-DXG
Power	150W	200W
Input Voltage	2200-240VAC	
PF	>0.9@220VAC	
Dimming (Optional)	0-10V/Dali Dimming	
CCT	3000K/4000K/5000K/6000K	
Ra > 80 5000K	Luminous Flux	195000Lm±5%
	Efficiency	130lm/W
Ra > 80 5000K	Luminous Flux	22500Lm±5%
	Efficiency	150Lm/W±5%
Light Type	SMD2835 / 3030	
Operation Temp	-20 C - 45 C	
Storage Temp	-20 C - 80 C	
Life Span	Ta 45 C L70>54000Hours	
IP Class	IP65	
IK Class	IK10	
Certificate	CE, RoHs, SAA	
Lamp Body Color	Housing: Aluminum Color: Silver Lens: PC	
Product Size (mm)	1200mm*175*75mm	1500*175*75mm
Packing Size (mm)	1250X230X235mm	1550X230X235mm
Quantity/carton	2pcs	2pcs
Gross weight (kg)	7.8kg	8.7kg
Installation mode	Surface Mount, Suspension Mount	