


## Features


- IP69K, IP66
- PC IK08
- System efficiency up to 150Lm/W
- High CRI>80, SDCM<3
- Environmentally friendly, no mercury, no UV, no IR
- Wide beam angle 120°
- Quick start instant 100% luminous flux
- 5 years warranty
- Certificate: CE, RoHS certified

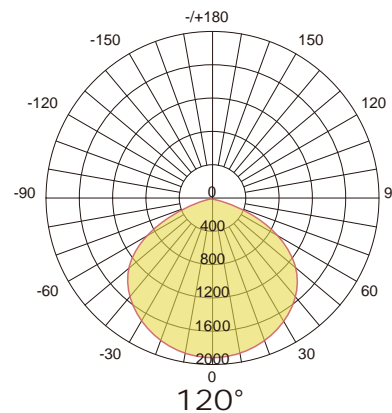


## Applications

- Car parks
- Ships
- Food processing
- Poultry lighting
- Farm lighting
- Water treatment plants
- Railway stations
- Car washing
- Airports
- Inspection pits
- Tunnels
- Port installations




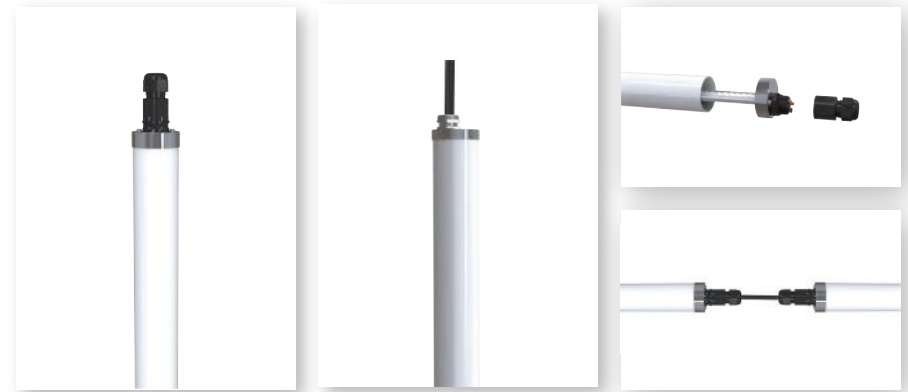


**Single Installation**




**Linkable Installation**



**Surface Mount**



**Suspension Mount**

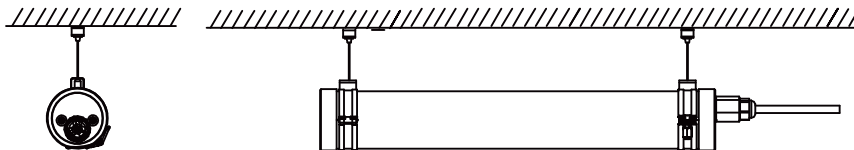

## Specifications

Product Code	TBL9M2F-15W	TBL9M4F-30W	TBL9M5F-45W
Power	15W	30W	45W
Input Voltage	100-240V / 277VAC (50/60Hz)		
Input Current	0.07A@220VAC	0.14A@220VAC	0.23A@220VAC
PF	0.90@220VAC		
Dimming Option	/		
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K		
Luminous Flux	1950Lm	3900Lm	5850Lm
Efficiency	130Lm/W±5% (Ra>80)		
Luminous Flux	2250Lm	4500Lm	6750Lm
Efficiency	150Lm/W±5% (Ra>80)		
LED Brand	Lumileds / Hongli 2835		
Beam Angle	120°		
Operation Temp	-20°C~+40°C		
Storage Temp	-20°C~+60°C		
Life Span	Ta 40°C L70>54000 hours		
IP Class	IP66 / IP69K		
IK Class	PC IK08		
Certificate	CE, RoHS		
Lamp Body Color	Milky PC / PMMA housing & 304 / 316 stainless steel end caps		
Product Size (mm)	Ø47*552	Ø47*1152	Ø47*1452
Packing Size (mm)	690*245*310	1290*245*310	1590*245*310
Quantity / Carton	20PCS	20PCS	20PCS
Gross Weight (kg) ±0.3	14	15	17.5
Installation Mode	Surface mount / Suspension mount		