




Features




- IP66, IK10
- Stainless steel clips & safety rope
- 5*2.5mm² through wiring
- 130Lm/W, 150Lm/W, 170Lm/W, 185Lm/W system efficiency, CRI>80 PC cover
- & PC base (V2)
- Self-test emergency with LiFePO4 battery option
- Microwave sensor options (wireless control)
- Ambient temperatures: -20°C ~ +40°C
- 5 years warranty, SAA, CE, RoHS, ENEC, certified
- Options: PIR sensor, Microwave motion sensor, DALI, 1-10V, Triac, Emergency
- Surface mount or suspension mount

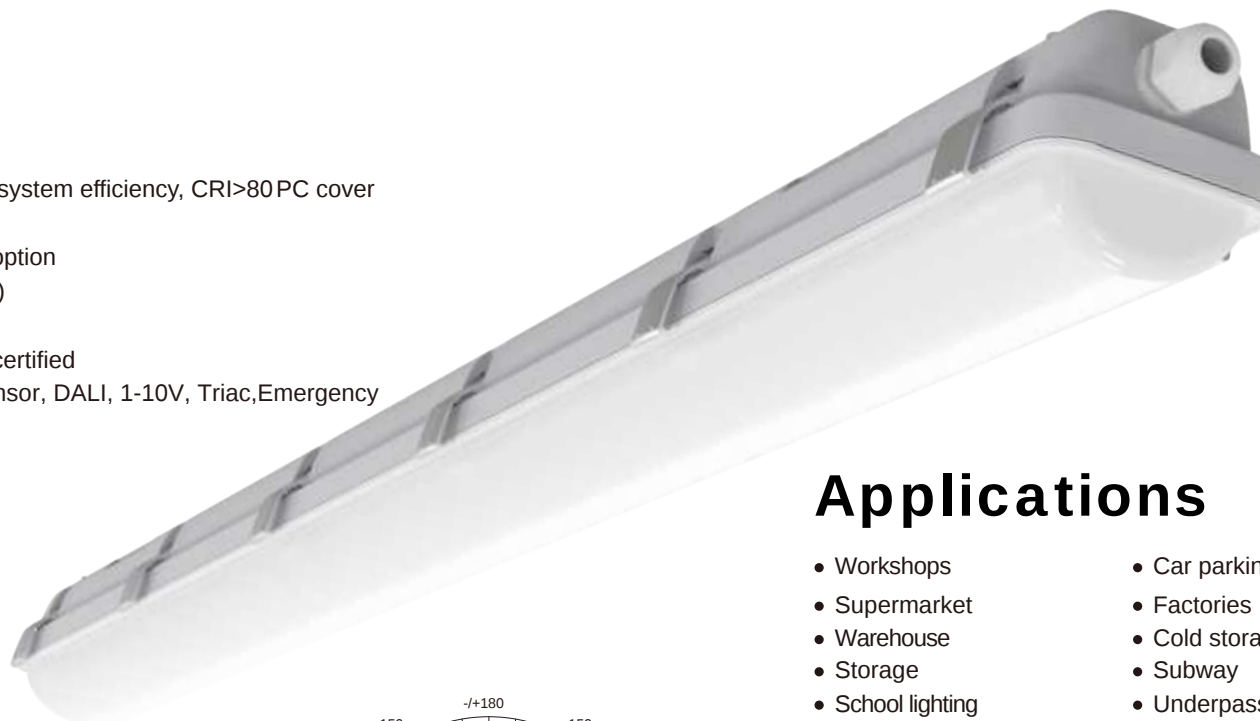

Applications

- Workshops
- Supermarket
- Warehouse
- Storage
- School lighting
- Car parking lighting
- Factories
- Cold storage
- Subway
- Underpass

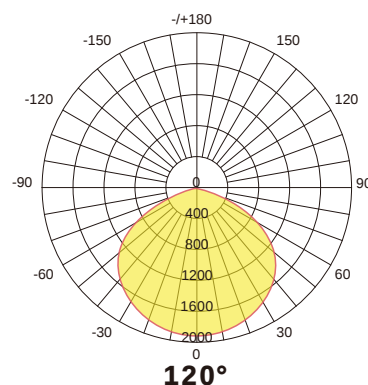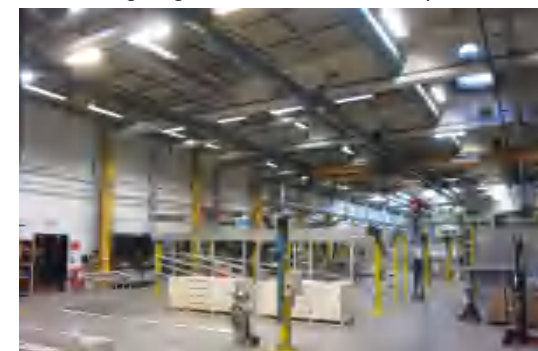

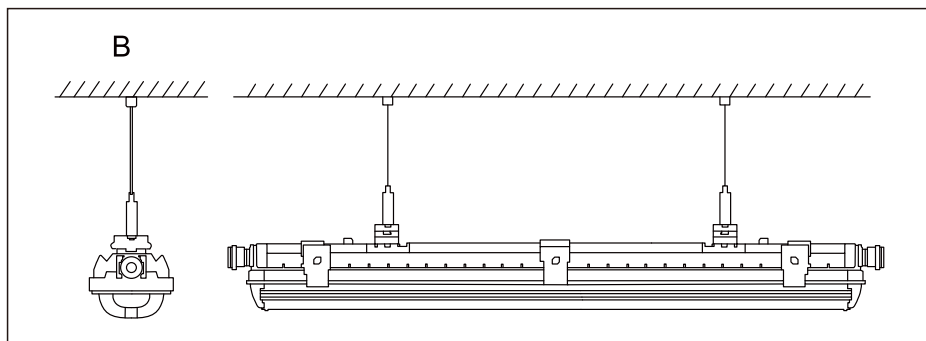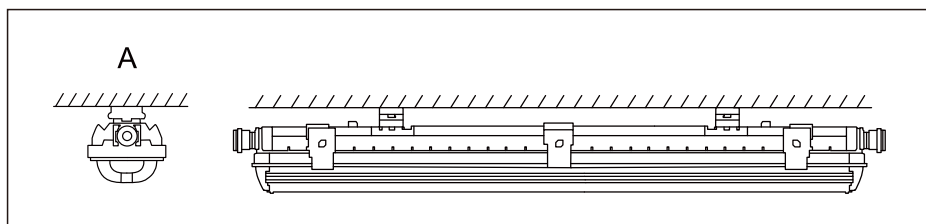

Specifications

Product Code	TBL10K2F-20W-K	TBL10K4F-40W-K	TBL10K5F-60W-K
Power	20W(18W/15W/13W)	40W(36W/30W/25W)	60W(52W/44W/35W)
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)		
PF	0.9A@220VAC		
Function Optional	PIR sensor, Microwave motion sensor, DALI, 1-10V, Triac, Emergency		
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K		
Luminous Flux	2600lm / 3000lm	5200lm / 6000lm	7800lm / 9000lm
Efficiency	130Lm/W±5% (Milky PC Cover) / 150Lm/W±5% (Milky PC Cover)		
Luminous Flux	3400lm / 3700lm	6800lm / 7400lm	10200lm / 11100lm
Efficiency	170Lm/W±5% (Milky PC Cover) / 185Lm/W±5% (Semi-clear PC Cover)		
LED Brand	Lumileds / Hongli 2835		
Driver Brand	BOKE		
Beam Angle	120°		
Operation Temp	-20°C~+40°C		
Storage Temp	-20°C~+60°C		
Life Span	Ta 40°C L70>54000 hours		
IP Class	IP66		
IK Class	IK10		
Certificate	SAA, CB, ENEC, CE, RoHS		
Lamp Body Color	PC Base (Grey) + PC Cover (Milky or Semi-clear)		
Product Size (mm)	600*95*83	1200*95*83	1500*95*83
Packing Size (mm)	690*335*300	1290*335*210	1590*335*210
Quantity / Carton	9PCS	6PCS	6PCS
Gross Weight (kg) ±0.3	12.6	20.2	24
Installation Mode	Surface mount / Suspension mount		