




## Features





- IP66, IK10
- Stainless steel clips & safety rope
- 5\*2.5mm<sup>2</sup> through wiring
- Isolated flicker free driver
- 140Lm/W ~ 160Lm/W system efficiency, CRI>80
- PC cover & PC base (V2)
- Self-test emergency with LiFePO4 battery option
- Microwave sensor options (wireless control)
- Ambient temperatures: -20°C ~ +40°C
- 5 years warranty, CE, RoHS, ENEC certified
- Options: 0-10V, motion sensor, DALI, emergency
- Surface mount or suspension mount

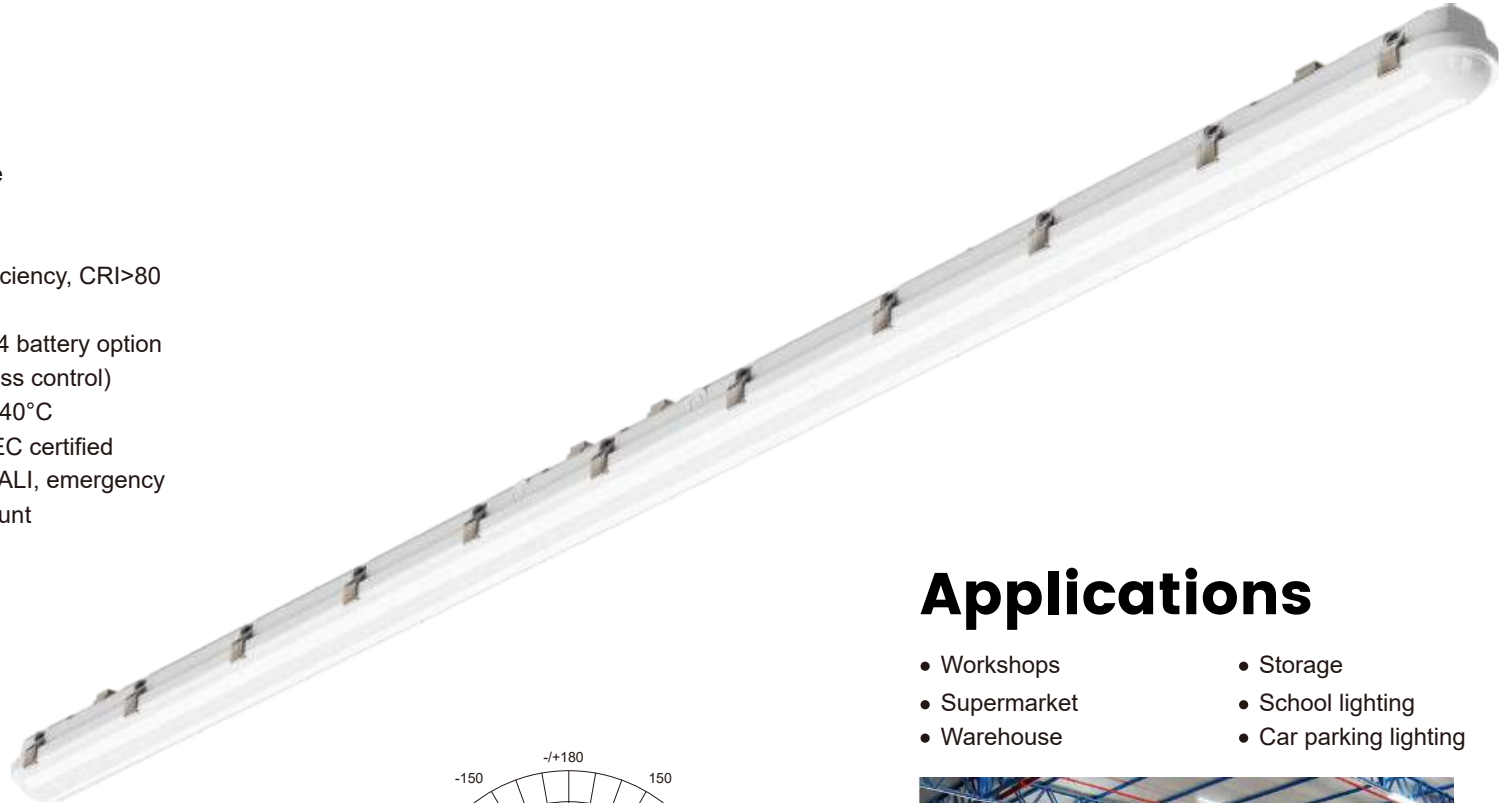

## Applications

- Workshops
- Supermarket
- Warehouse
- Storage
- School lighting
- Car parking lighting

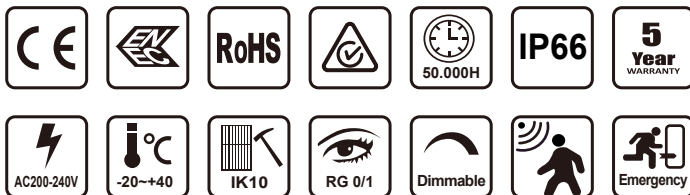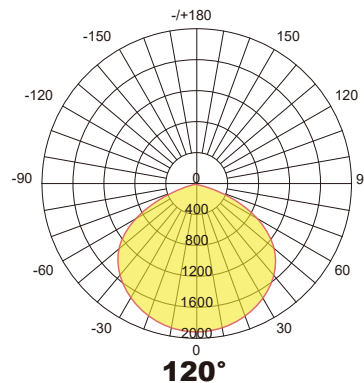

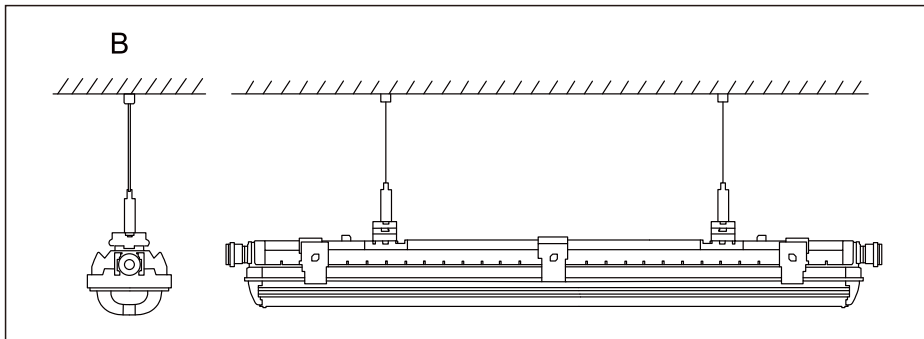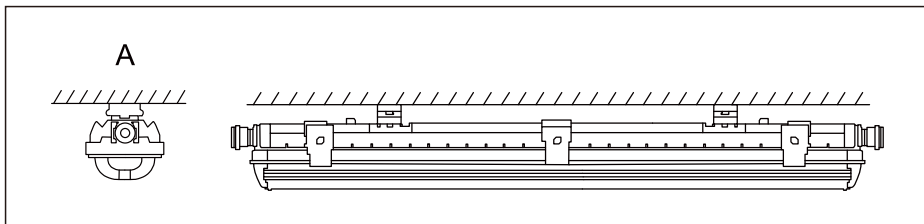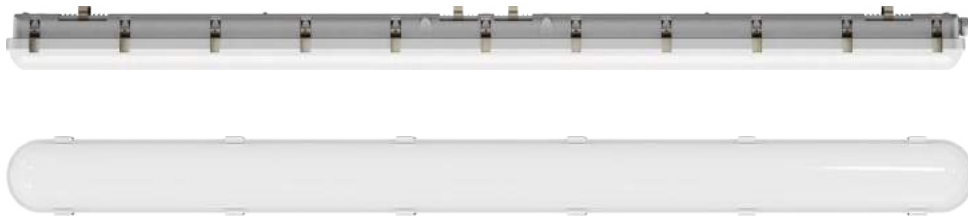

## Specifications

Product Code	TBL10A2F-20W-S	TBL10A4F-40W-S	TBL10A5F-50W-S	TBL10A5F-60W-S
Power	20W	40W	50W	60W
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)			
PF	0.9A@220VAC			
Dimming Option	0-10V / DALI, MW sensor, emergency			
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K			
Luminous Flux	2800Lm	5600Lm	7000Lm	8400Lm
Efficiency	140Lm/W±5% (Ra>80)			
Luminous Flux	3200Lm	6400Lm	8000Lm	9600Lm
Efficiency	160Lm/W±5% (Ra>80)			
LED Brand	Lumileds / Hongli 2835			
Beam Angle	120°			
Operation Temp	-20°C~+40°C			
Storage Temp	-20°C~+60°C			
Life Span	Ta 40°C L70>54000 hours			
IP Class	IP66			
IK Class	IK10			
Certificate	ENEC, CE, RoHS			
Lamp Body Color	PC Base (Grey) + PC Cover (Milky)			
Product Size (mm)	600*95*80	1200*95*83	1500*95*83	1500*95*83
Packing Size (mm)	690*335*300	1290*335*210	1590*335*210	1590*335*210
Quantity / Carton	9PCS	6PCS	6PCS	6PCS
Gross Weight (kg) ±0.3	13	15	19	19
Installation Mode	Surface mount / Suspension mount			