


Features



- IP66, IK08
- Stainless steel clips
- Isolated flicker free driver
- PC milky cover
- Self-test emergency with LiFePO4 battery optional
- Microwave sensor options (wireless control)
- Ambient temperature: -20°C ~ +40°C
- 5 years warranty, CE, RoHS, ENEC certified
- Options: 0-10V, motion sensor, DALI, emergency
- Surface mount or suspension mount



Applications

- Workshops
- Supermarket
- Warehouse
- Storage
- School lighting
- Car parking lighting

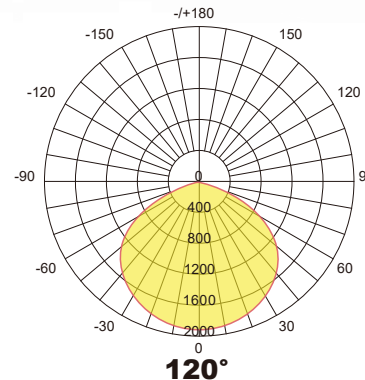

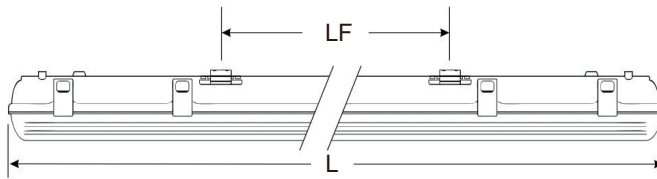

Specifications

Product Code	TBL10A2F-18W-O	TBL10A4F-36W-O	TBL10A5F-50W-O	TBL10A5F-60W-O
Power	18W	36W	50W	60W
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)			
Input Current	0.09A@220VAC	0.23A@220VAC	0.28A@220VAC	0.38A@220VAC
PF	0.90@220VAC			
Dimming Option	0-10V / DALI			
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K			
Luminous Flux	2340Lm	4680Lm	6500Lm	7800Lm
Efficiency	130Lm/W±5% (Ra>80)			
LED Brand	Hongli 2835			
Beam Angle	120°			
Operation Temp	-20°C~+40°C			
Storage Temp	-20°C~+60°C			
Life Span	Ta 40°C L70>54000 hours			
IP Class	IP66			
IK Class	IK08			
Certificate	CE, RoHS, ENEC IK08, IP66			
Lamp Body Color	PC Base (Grey) + PC Cover (Milky)			
Product Size (mm)	600*80*72	1200*80*72	1500*80*72	1500*80*72
Packing Size (mm)	650*290*430	1250*290*260	1550*290*260	1550*290*260
Quantity / Carton	15PCS	9PCS	9PCS	9PCS
Gross Weight (kg) ±0.3	19	18	21	21
Installation Mode	Surface mount / Suspension mount			