

UGR<19 LED Linear High Bay Light G2 DXG



Features




- High output LED's, up to 130lm/W, LM80 certified light source
- High CRI>80
- Brand driver, TUV UL CE certified, PF>0.96, THD<12
- Flicker free
- Environmentally friendly, no mercury, no UV, no IR
- IP65, indoor & outdoor using
- Quick start instant 100% luminous flux
- 5 years warranty
- Certificate: CE, RoHS
- Options: 1-10V dimming, microwave
- Hanging mount accessories included



Applications

- Factories
- Airport
- Bus station
- Warehouse
- Workshops
- Supermark
- Sports halls
- Exhibition halls
- Badminton court

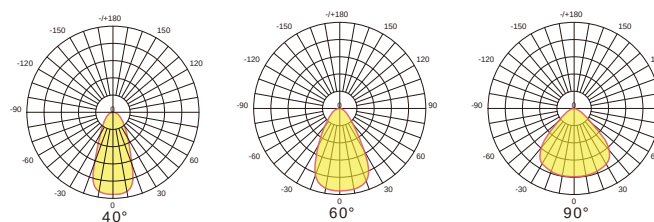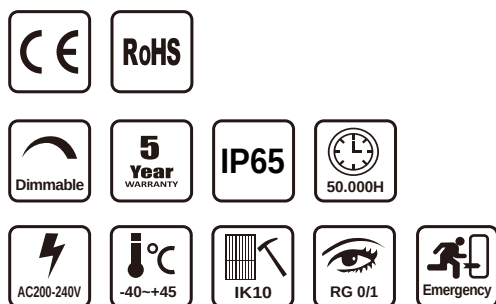

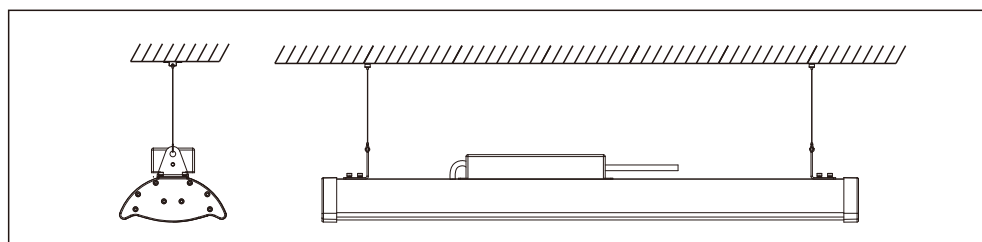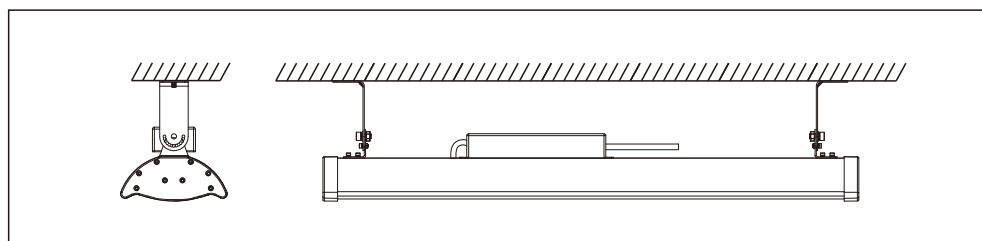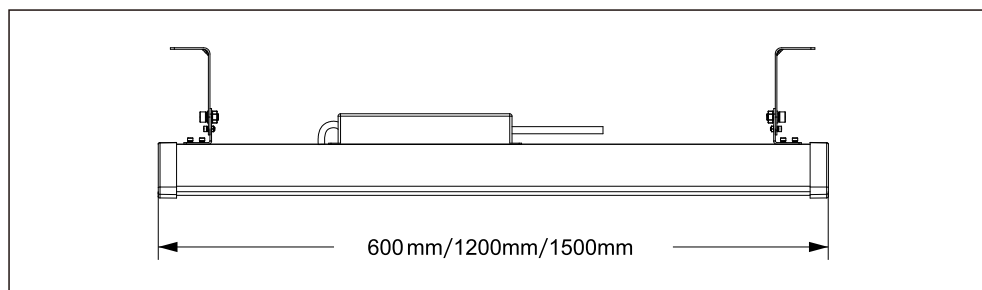

Specifications

Product Code	MG-HT150WF-DXG	MG-HT200WF-DXG
Power	150W	200W
Input Voltage	2200-240VAC	
PF	>0.9@220VAC	
Function Optional	1-10V / DALI dimming / Emergency	
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K	
Luminous Flux	195000Lm	26000Lm
Efficiency	130lm/W±5% (Ra>80 5000K)	
Light Type	Lumileds / Hongli 3030 / 5050	
Driver Brand	Sosen / Meanwell	
Operation Temp	-40°C ~ 45°C	
Storage Temp	-40°C ~ 80°C	
Life Span	Ta 45°C L70>54000 hours	
IP Class	IP65	
IK Class	IK10	
Certificate	CE, RoHS, SAA	
Lamp Body Color	Housing: aluminum Color: silver Lens: PC	
Product Size (mm)	1200*175*75	1500*175*75
Packing Size (mm)	1250*230*235	1550*230*235
Quantity / Carton	2pcs	2pcs
Gross Weight (kg)	15kg	21.7kg
Installation Mode	Surface mount / Suspension mount	