


LED Linear High Bay Light G2



Features

- High output LED's, up to 130Lm/W ~ 150Lm/W
- High CRI>80
- Brand driver, TUV UL CE certified, PF>0.96, THD<12
- Flicker free
- Environmentally friendly, no mercury, no UV, no IR
- IP65, indoor use
- Quick start instant 100% luminous flux
- 5 years warranty
- Optional: 1-10V, DALI dimming, microwave
- Surface mount & suspension mount optional
- Certificate: CE, RoHS, FCC

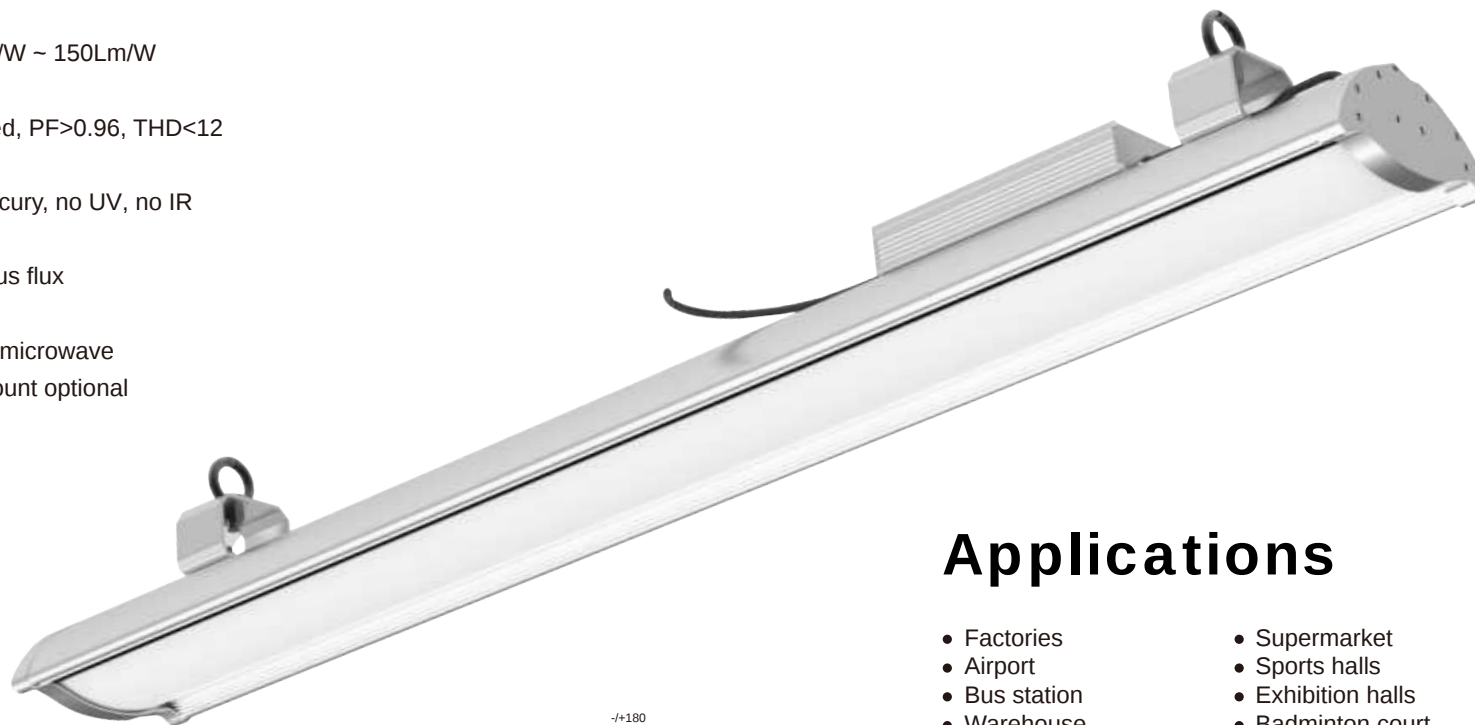

Applications

- Factories
- Airport
- Bus station
- Warehouse
- Workshops
- Supermarket
- Sports halls
- Exhibition halls
- Badminton court

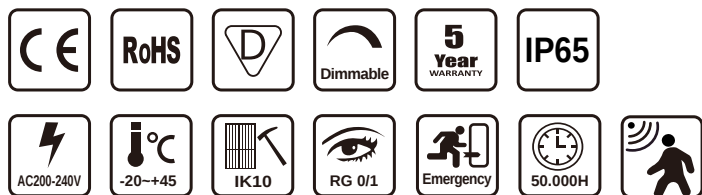



Specifications

Product Code	TB-HT080W-G2	TB-HT100W-G2	TB-HT150W-G2	TB-HT200W-G2
Power	60W/80W	100W	150W	200W
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)			
PF	>0.9@220VAC			
Function Optional	1-10V / DALI dimming / Emergency / sensor			
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K			
Luminous Flux	10400Lm	13000Lm	19500Lm	26000Lm
Efficiency	130Lm/W±5% (Ra>80 5000K)			
Luminous Flux	12000Lm	15000Lm	22500Lm	30000Lm
Efficiency	150Lm/W±5% (Ra>80 5000K)			
Light Type	Lumileds / Hongli 2835 / 3030			
Driver Brand	Sosen / Meanwell			
Operation Temp	-20°C~+45°C			
Storage Temp	-20°C~+60°C			
Life Span	Ta 45°C L70>54000 hours			
IP Class	IP65			
IK Class	IK10			
Certificate	CE, RoHS, FCC			
Lamp Body Color	Housing: aluminum Color: silver Lens: PC			
Product Size (mm)	600*175*75	900*175*75	1200*175*75	1500*175*75
Packing Size (mm)	650*250*220	950*250*220	1250*250*220	1550*250*220
Quantity / Carton	2pcs	2pcs	2pcs	2pcs
Gross Weight (kg)	7.2kg	10.3kg	13.8kg	20.2kg
Installation Mode	Surface mount / Suspension mount			

