
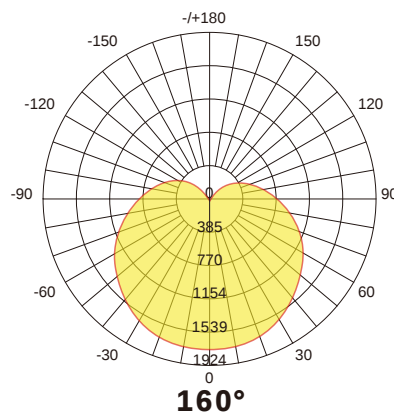
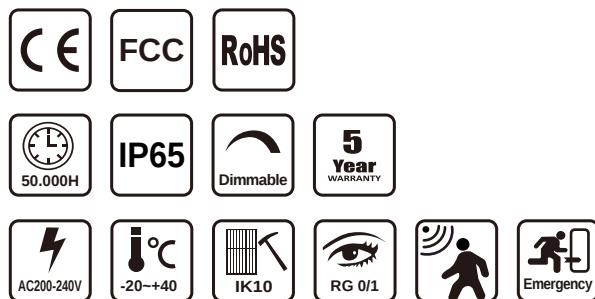


Features



- 130Lm/W standard, 150Lm/W optional
- High CRI>80
- Wide beam angle 160°
- IP65 waterproof, dust corrosion and pressure-proof, for indoor use
- Aluminium housing & PC cover
- 5 years warranty
- Certificate: CE, RoHS, DLC, ETL
- Optional: 0-10V, DALI dimming
- Hanging mount accessories included, 90° adjustable mounting clips for option

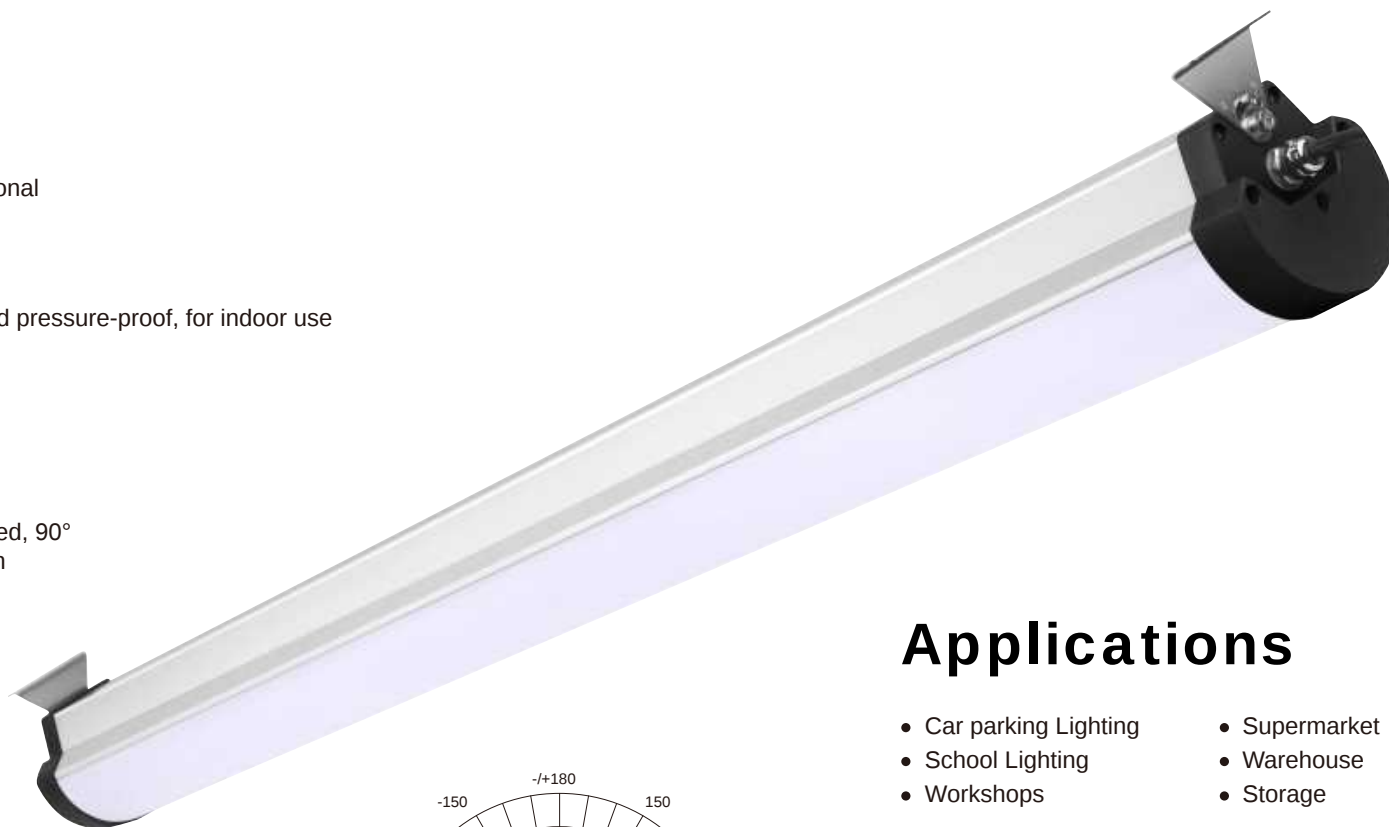

Applications

- Car parking Lighting
- School Lighting
- Workshops
- Supermarket
- Warehouse
- Storage




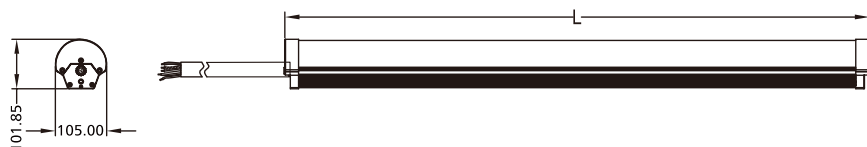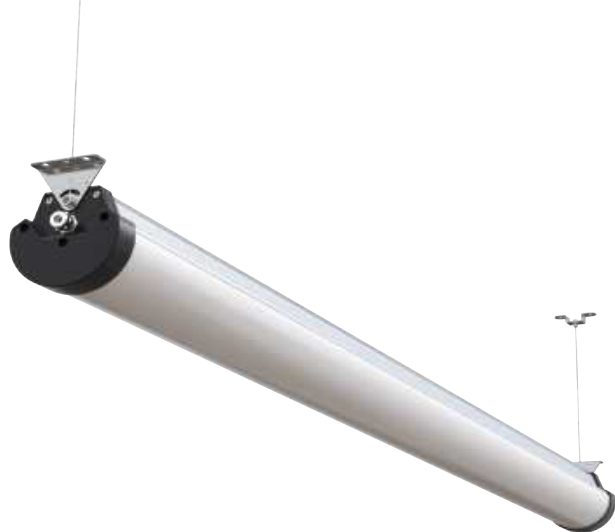

Surface Mount



Suspension Mount

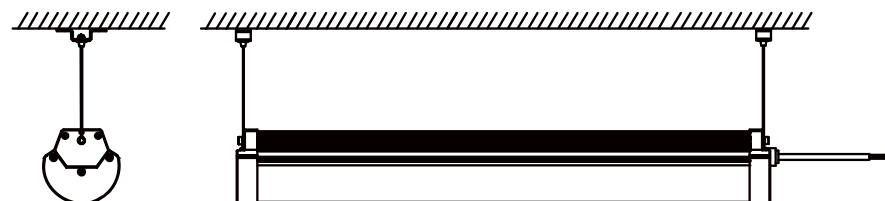

Specifications

Product Code	TBF2F-20W	TBF4F-40W	TBF4F-60W	TBF5F-60W	TBF5F-80W	TBF5F-100W
Power	20W	40W	60W	60W	80W	100W
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)					
PF	0.90@220VAC					
Function Optional	0-10V / DALI					
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K /6500K					
Luminous Flux	2600Lm	5200Lm	7800Lm	7800Lm	10400Lm	13000Lm
Efficiency	130Lm/W±5% (Ra>80)					
Luminous Flux	3000Lm	6000Lm	9000Lm	9000Lm	12000Lm	15000Lm
Efficiency	150Lm/W±5% (Ra>80)					
LED Brand	Lumileds / Hongli 2835					
Driver Brand	BOKE / Sosen					
Beam Angle	160°					
Operation Temp	-20°C~+40°C					
Storage Temp	-20°C~+60°C					
Life Span	Ta 40°C L70>54000 hours					
IP Class	IP65					
IK Class	IK10					
Certificate	CE, RoHS, DLC, ETL					
Lamp Body Color	Silver aluminium housing + Milky PC cover					
Product Size (mm)	600*105*127	1200*105*127			1500*105*127	
Packing Size (mm)	690*245*245	1290*245*245			1590*245*245	
Quantity / Carton	4PCS	4PCS			4PCS	
Gross Weight (kg) ±0.3	8.3	15.5			19.1	
Installation Mode	Surface mount / Suspension mount					