


Features

- IP65
- PC IK08
- System efficiency up to 130Lm/W & 150Lm/W
- High CRI>80
- Environmentally friendly, no mercury, no UV, no IR
- Wide beam angle 180°
- Energy efficiency Grade: D
- Quick start instant 100% luminous flux
- 5 years warranty on complete fixture (LED's, Driver & Housing)
- Certificate: CE, RoHs Certified
- Surface Mount or Suspension Mount




Applications

- Car parks
- Ships
- Food Processing
- Poultry Lighting
- Farm lighting
- Railway stations

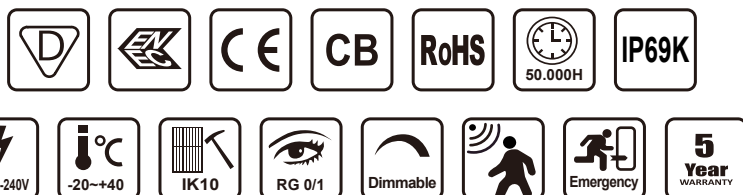





Single Installation




Linkable Installation



Surface Mount



Suspension Mount

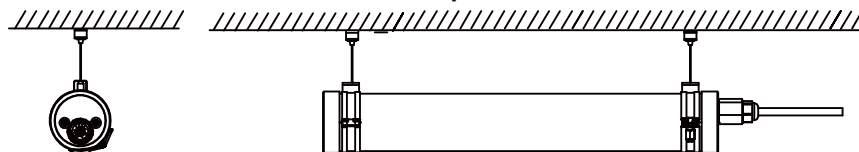

Specifications

Product Code	TBL9M2F-15W	TBL9M4F-30W	TBL9M5F-45W
Power	15W	30W	45W
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)		
Input Current	0.15A@220VAC	0.3A@220VAC	0.4A@220VAC
PF	0.90@220VAC		
Dimming Option	/		
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K		
Luminous Flux	1950Lm / 2250Lm	3900Lm / 4500Lm	5850Lm / 6750Lm
Efficiency	130Lm/W / 150Lm/W±5% (Ra>80)		
LED Brand	Lumileds / Hongli 2835		
Beam Angle	180°		
Operation Temp	-20°C~+40°C		
Storage Temp	-20°C~+60°C		
Life Span	Ta 40°C L70>54000 hours		
IP Class	IP65		
IK Class	PC IK08		
Certificate	CE, RoHs		
Lamp Body Color	Milky PC / PMMA Housing & 304 / 316 Stainless Steel End Caps		
Product Size (mm)	Ø45*552	Ø45*1152	Ø45*1452
Packing Size (mm)	690*245*310	1290*245*310	1590*245*310
Quantity / Carton	20PCS	20PCS	20PCS
Gross Weight (kg) ±0.3	14	15	17.5
Installation Mode	Surface mount / Suspension mount		