
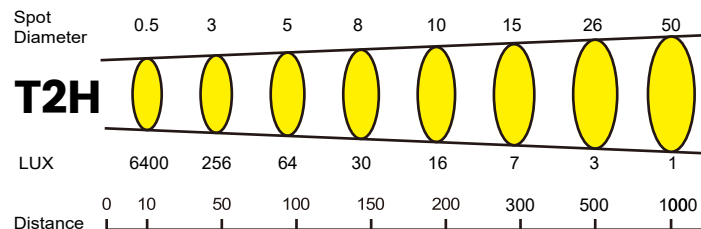


Features




- Protection class: IP66
- Irradiation distance: T2L $\geq 300\text{m}$ (1LUX) T2H $\geq 1000\text{m}$ (1LUX)
- Beam angle: 8°/3°
- Slip-rings provide continuous 360° horizontal rotation with no stop points
- Manually adjust rotation
- Approved for temperatures down to -40°C and up to +55°C
- Materials: marine grade aluminum and stainless steel with salt-resistant powder coat finish
- Lower power consumption: LED's consume 75% or more less power than Halogen lamps
This reduces lamp replacement costsincreases reliability
- Longer life: LED's last tens-of-thousands of hours compared to approximately 250 to2000 hours depending upon the Halogen lamp.This reduces lamp replacement costsincreases reliability

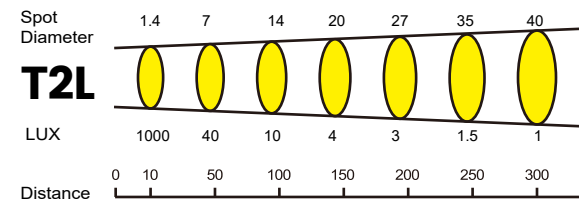

Applications

- National defense
- Marine
- Military
- Water conservation
- Expedition and oil field
- Wharf
- Large surface warship
- Maritime search and rescue



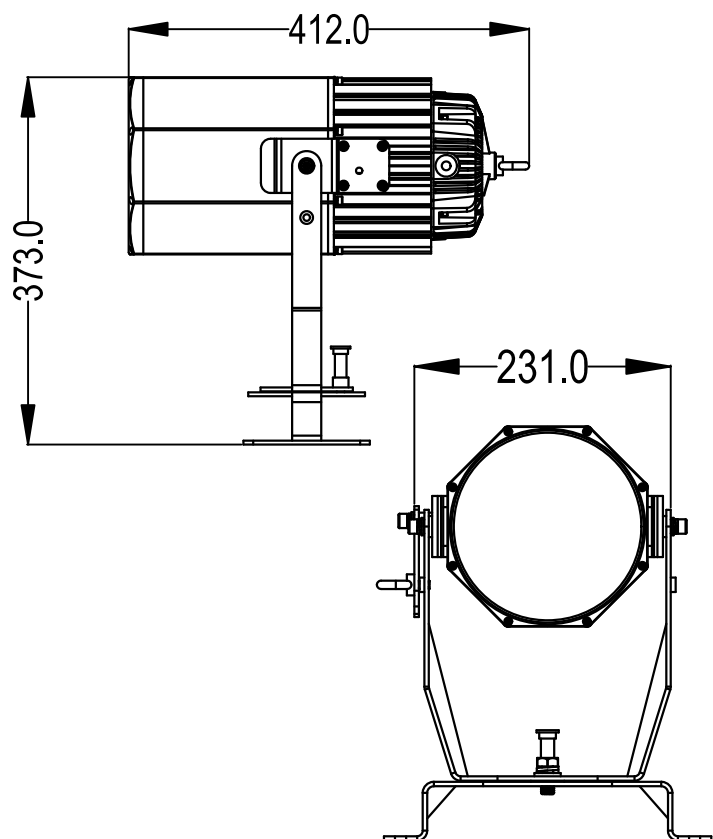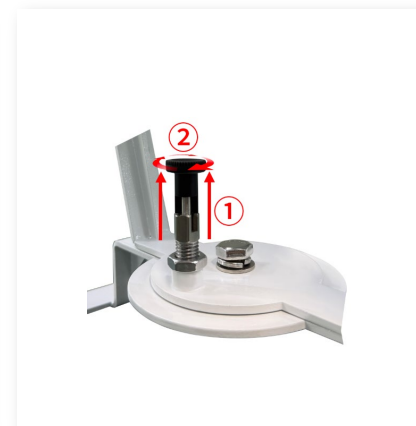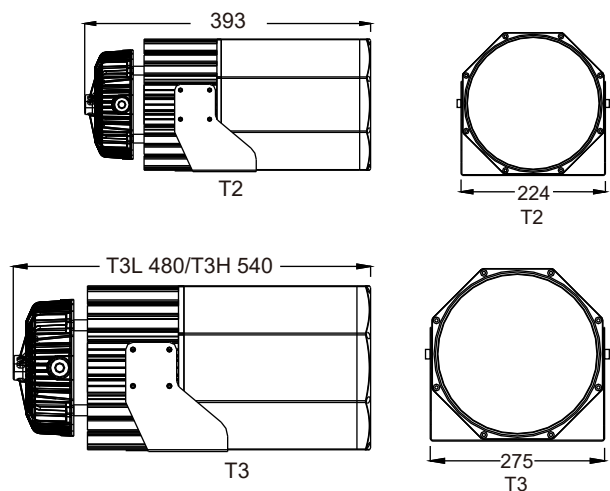

Specifications

Model	TBSL-T2L-160E-C	TBSL-T2H-160E-C	
Light Information	Light Source	LED	
	Power Consumption	160W	
	Color Temperature	6500K	
	Input Voltage	100-277V 50/60Hz / 200-240V 50/60Hz	
	Operating Temperature	-40°C ~ +55°C	
	IP Rating	IP66	
	Lifespan	3 years	
	Beam Angle	8°	3°
	Beam Distance	≥300m (1LUX)	≥1000m (1LUX)
	Material	1060AL	
	Product Size (mm)	400*400*320	
	Weight	12Kg	
Quantity/carton	1PCS		