

TUBU

Ø100mm Grid Type LED Tubular Light




Features


- IP67 & IP69K & IK10
- PMMA IK08 / PC IK10
- Anti-ammonia
- Against water pressure of 100bar (1450psi) and temperature of 80°C
- System efficiency
- High CRI>80
- Environmentally friendly, no mercury, no UV, no IR
- Wide beam angle 80°x120°
- Grid angle 45°(60Lm/W) / 90°(100Lm/W)
- Quick Start instant 100% luminous flux
- 5 years warranty on complete fixture (LED's, Driver & Housing)
- Certificate: CE, RoHS Certified
- Surface Mount or Suspension Mount




Applications

- Offices
- Conference rooms
- Stores
- Showrooms
- Living rooms
- Bedrooms
- Kitchens
- Libraries
- Museums
- Hospitals
- Medical institutions
- Bathrooms

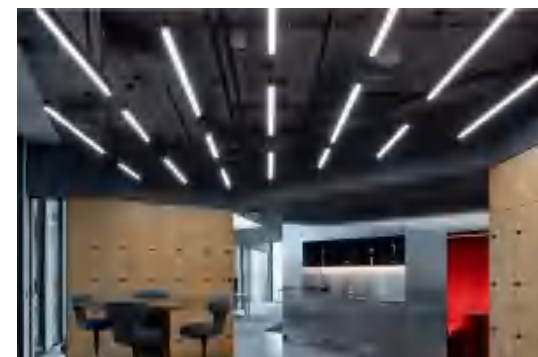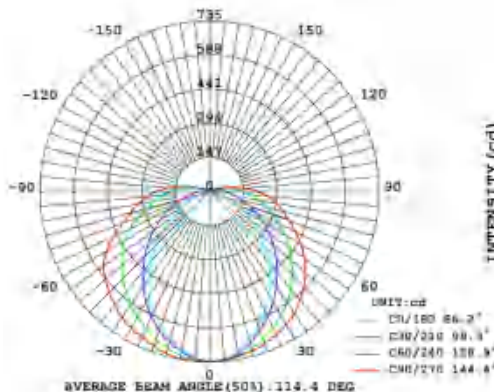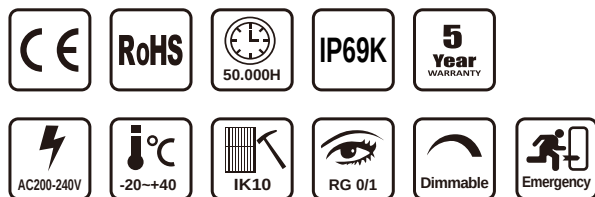


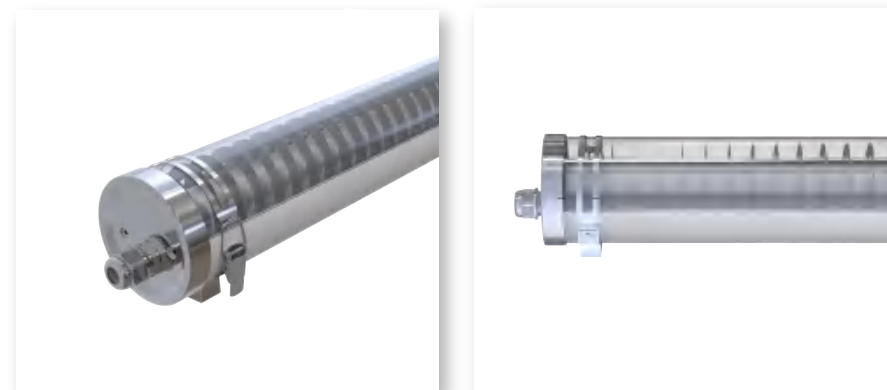


Single Installation




Linkable Installation



Surface Mount



Suspension Mount

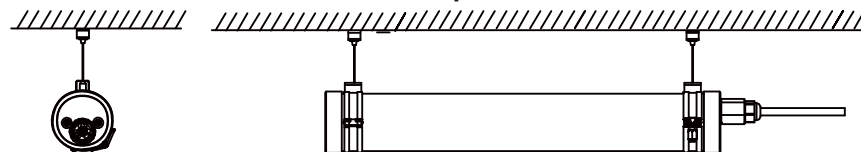

Specifications

Product Code	TBL9P2F-20W	TBL9P4F-40W	TBL9P5F-60W
Power	20W	40W	60W
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)		
Input Current	0.15A@220VAC	0.3A@220VAC	0.4A@220VAC
PF	0.90@220VAC		
Function Optional	0-10V/Dali / Emergency		
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K /6500K		
Luminous Flux	1200Lm / 2000Lm	2400Lm / 4000Lm	3600Lm / 6000Lm
Efficiency	60Lm/W±5% (45°) 100Lm/W±5% (90°)		
LED Brand	Lumileds/Hongli 2835		
Driver Brand	BOKE		
Beam Angle	80°x120°		
Operation Temp	-20°C~+40°C		
Storage Temp	-20°C~+60°C		
Life Span	Ta 40°C L70>54000 hours		
IP Class	IP67 & IP69K		
IK Class	PMMA IK08 / PC IK10		
Certificate	CE, RoHS, IK10, IP69K		
Lamp Body Color	Milky PC/PMMA Housing & 304/316 Stainless Steel End Caps		
Product Size (mm)	Ø105*552	Ø105*1152	Ø105*1452
Packing Size (mm)	730*340*345mm	1330*345*240mm	1630*345*240mm
Quantity / Carton	9PCS	6PCS	6PCS
Gross Weight (kg) ±0.3	17.8	23.2	28.8
Installation Mode	Surface mount / Suspension mount		