


# TUBU

# High Borosilicate Glass LED Tri-Proof Light

## Features

- IP67 & IP69K & IK07
- High borosilicate glass, chemical resistant
- High corrosion resistance, high hardness, acid and alkali resistant
- Against water pressure of 100bar (1450psi) and temperature of 80°C
- High borosilicate glass has a very low thermal expansion coefficient and high temperature resistance, and the instantaneous temperature difference is -20°C - 150°C (under the temperature mutation within 200 degrees), which is not easy to burst
- Meet the food-grade standards
- System efficiency 130Lm/W & 150Lm/W
- High CRI>80
- Environmentally friendly, no mercury, no UV, no IR
- 5 years warranty
- Wide beam angle 120°
- Quick start instant 100% luminous flux
- Certificate: CE, RoHS certified
- Surface mount or suspension mount

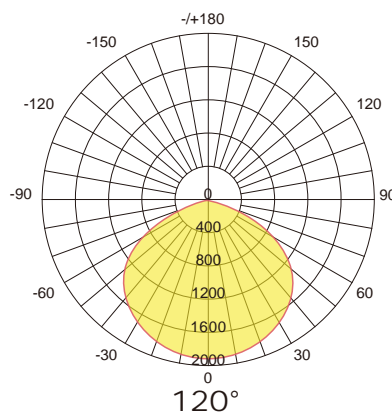


## Applications

- Car parks
- Food processing
- Poultry lighting
- Farm lighting
- Water treatment plants
- Island city
- Desert city
- Wetland environment
- War industry
- Ships
- Railway stations
- Car washing
- Airports
- Inspection pits
- Tunnels
- Port installations
- Smelting factory
- Chemical plant
- Outdoor mining
- Hospital







**Single Installation**




**Linkable Installation**



**Surface Mount**



**Suspension Mount**

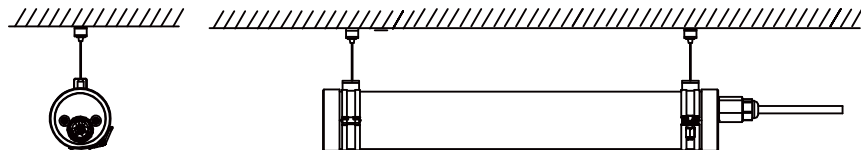

## Specifications

Product Code	TBL92F-20W	TBL94F-40W	TBL95F-50W	TBL95F-60W
Power	20W	40W	50W	60W
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)			
Input Current	0.09A@220VAC	0.19A@220VAC	0.23A@220VAC	0.28A@220VAC
PF	0.90@220VAC			
Function Optional	0-10V / DALI / Sensor / Emergency			
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K			
Luminous Flux	2600Lm	5200Lm	6500Lm	7800Lm
Efficiency	130Lm/W±5% (Ra>80)			
Luminous Flux	3000Lm	6000Lm	7500Lm	9000Lm
Efficiency	150Lm/W±5% (Ra>80)			
LED Brand	Lumileds / Hongli 2835			
Driver Brand	BOKE			
Beam Angle	120°			
Operation Temp	-20°C~+40°C			
Storage Temp	-20°C~+60°C			
Life Span	Ta 40°C L70>54000 hours			
IP Class	IP67 & IP69K			
IK Class	Glass IK07			
Certificate	CE, RoHS, IK07, IP69K			
Lamp Body Color	Glass transparent & 304 / 316 stainless steel end caps			
Product Size (mm)	Ø75*552	Ø75*1152	Ø75*1452	Ø75*1452
Packing Size (mm)	730*345*240	1330*345*240	1630*345*240	1630*345*240
Quantity / Carton	6PCS	4PCS	4PCS	4PCS
Gross Weight (kg) ±0.3	8.6	11.5	13.8	13.8
Installation Mode	Surface mount / Suspension mount			