







Features


- Patented design
- System efficiency 150Lm/w (180Lm/w optional)
- Driver for option, PF>0.95 BOKE
- 3030/5050 SMD LED, CRI>80
- Available with 30° / 60° / 70° (UGR≤22) / 90° beam angle
- 2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K
- Long life span, L70>100,000 hours
- Controls and dimming: DALI control & 1-10V dimming

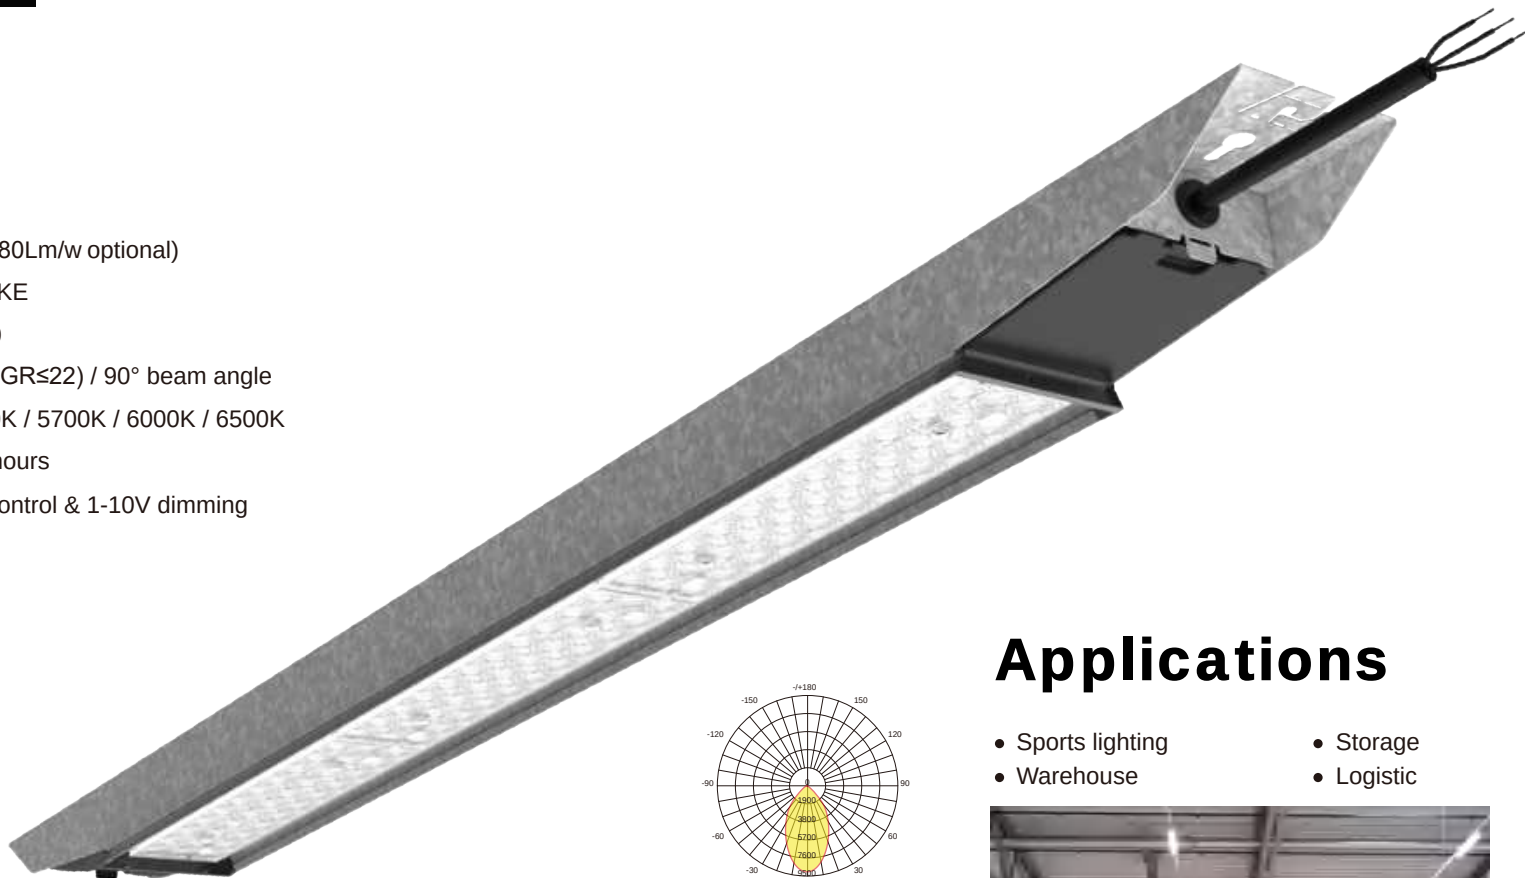

Applications

- Sports lighting
- Warehouse
- Storage
- Logistic

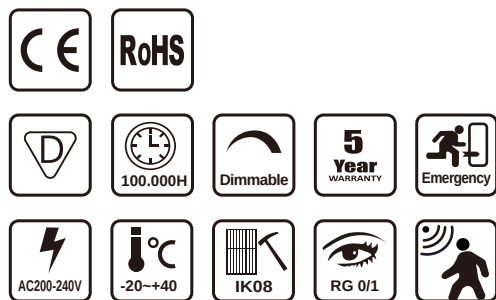

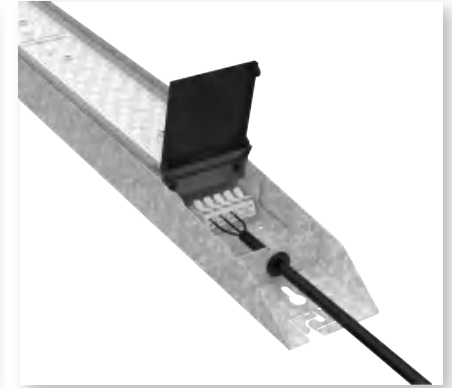

Specifications

Product Code	TBL16-75W	TBL16-90W	TBL16-120W
Power	75W	90W	120W
Input Voltage	200-240VAC (50/60Hz)		
Input Current	0.35A@220VAC	0.45A@220VAC	0.6A@220VAC
PF	0.90@220VAC		
Function Optional	DALI / 1-10V / Emergency / Sensor		
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K		
Luminous Flux	11250Lm / 13500Lm	13500Lm / 16200Lm	18000Lm / 21600Lm
Efficiency	150Lm/w±5% / 180Lm/w±5% (Ra>80)		
LED Brand	Lumileds / Hongli 3030 / 5050		
Driver Brand	BOKE		
Beam Angle	30° / 60° / 70°(UGR≤22) / 90°		
Operation Temp	-20°C~+40°C		
Storage Temp	-20°C~+60°C		
Life Span	Ta 40°C L70>100,000 hours		
IP Class	IP23		
IK Class	IK08		
Certificate	CE, RoHS		
Lamp Body Color	Painted (Ral 9006) galvanised steel		
Product Size (mm)	1230*94*66	1830*94*66	1830*94*66
Packing Size (mm)	1270*241*260	1840*241*185	1840*241*185
Quantity / Carton	4PCS	4PCS	4PCS
Gross Weight (kg) ±0.3	10.1	14.6	14.6
Installation Mode	Surface mount / Suspension mount		

