



## Features

- IP65 & IK08
- Wireless control: microwave sensor, PIR sensor, Zhaga socket
- 3 core & 5 core through wiring
- Dial to adjusting power and color temperature
- Housing material: PC
- System efficiency up to 140Lm/W & 160Lm/W
- High CRI>85
- Environmentally friendly, no mercury, no UV, no IR
- Wide beam angle 120°
- 5 years warranty
- Quick start instant 100% luminous flux
- Certificate: CE, RoHS, ENEC, CB, RED certified
- Surface mount or suspension mount




## Applications

- Workshops
- Supermarket
- Warehouse
- Walkway
- School lighting
- Car parking lighting

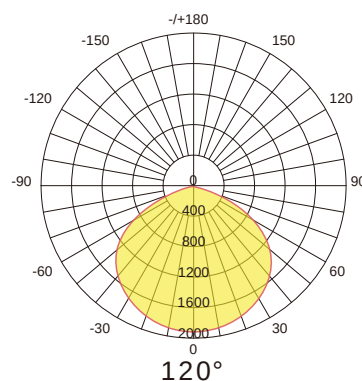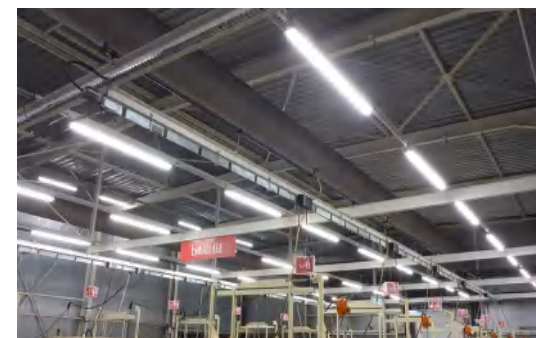





Single Installation

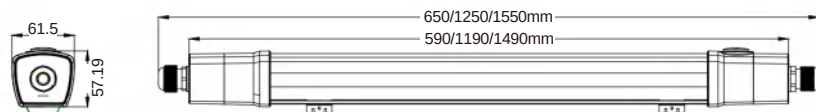


Linkable Installation

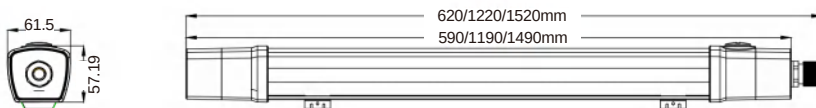


Surface Mount

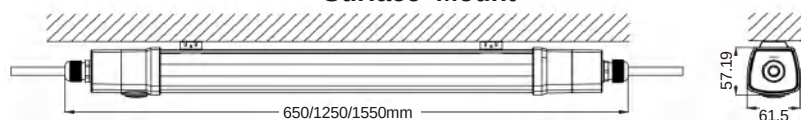

Suspension Mount

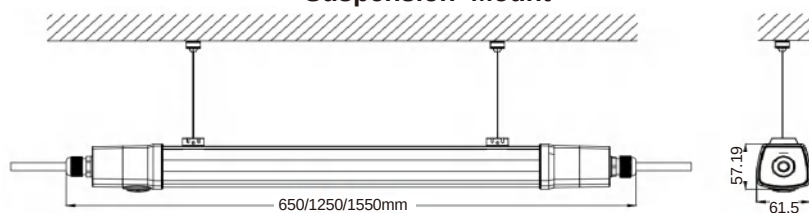

Hook Mount

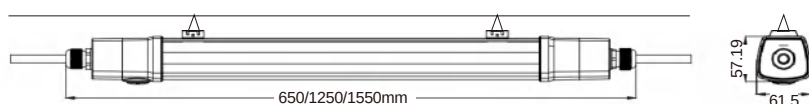

## Specifications

| Product Code                 | TBL11P2F-25W                                         | TBL11P4F-35W          | TBL11P5F-45W          |
|------------------------------|------------------------------------------------------|-----------------------|-----------------------|
| Power                        | 25W (25W/21W/18W/15W)                                | 35W (35W/30W/25W/20W) | 45W (45W/38W/32W/25W) |
| Input Voltage                | 200-240VAC / 100-277VAC (50/60Hz)                    |                       |                       |
| Input Current                | 0.12A@220VAC                                         | 0.18A@220VAC          | 0.23A@220VAC          |
| PF                           | 0.90@220VAC                                          |                       |                       |
| Function Optional            | 0-10V / DALI / MW Sensor / PIR / Emergenay           |                       |                       |
| CCT                          | 2700K / 3000K / 4000K / 5000K / 5700K / 6000K /6500K |                       |                       |
| Luminous Flux                | 3500Lm                                               | 4900Lm                | 6300Lm                |
| Efficiency                   | 140Lm/W±5% (Ra>85)                                   |                       |                       |
| Luminous Flux                | 4000Lm                                               | 5600Lm                | 7300Lm                |
| Efficiency                   | 160Lm/W±5% (Ra>85)                                   |                       |                       |
| LED Brand                    | Lumileds / Hongli 2835                               |                       |                       |
| Driver Brand                 | BOKE                                                 |                       |                       |
| Beam Angle                   | 120°                                                 |                       |                       |
| Operation Temp               | -20°C~+40°C                                          |                       |                       |
| Storage Temp                 | -20°C~+60°C                                          |                       |                       |
| Life Span                    | Ta 40°C L70>54000 hours                              |                       |                       |
| IP Class                     | IP65                                                 |                       |                       |
| IK Class                     | PC IK08                                              |                       |                       |
| Certificate                  | CE, RoHS, IK08, ENEC, CB, RED                        |                       |                       |
| Lamp Body Color              | Milky PC                                             |                       |                       |
| Product Size (mm)            | 650*58*62                                            | 1250*58*62            | 1550*58*62            |
| Individual Package Size (mm) | 660*65*65                                            | 1260*65*65            | 1560*65*65            |
| Packing Size (mm)            | 680*215*215                                          | 1280*215*215          | 1580*215*215          |
| Quantity / Carton            | 9PCS                                                 | 9PCS                  | 9PCS                  |
| Gross Weight (kg) ±0.3       | 6.3                                                  | 11.8                  | 14.6                  |
| Installation Mode            | Surface mount / Suspension mount / Hook Mount        |                       |                       |