

TUBU

Tube Style LED Tubular Light


Features

- IP67 & IP69K
- PMMA IK08 / PC IK10
- Against water pressure of 100bar (1450psi) and temperature of 80°C
- System efficiency 130Lm/W
- High CRI>80
- Environmentally friendly, no mercury, no UV, no IR
- Wide beam angle 120°
- Quick start instant 100% luminous flux
- 5 years warranty
- Certificate: CE, RoHS certified
- Surface mount or suspended




Applications

- Office
- Warehouse
- Schools
- Hospitals
- Metro Station
- Shopping malls
- Supermarkets
- Hotels
- Factories
- Workshops
- Street lighting
- Landscape lighting

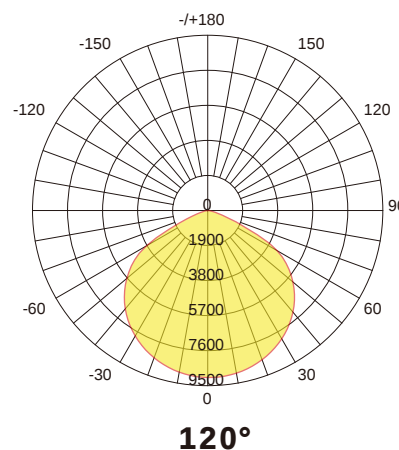





Single Installation




Linkable Installation



Surface Mount



Suspension Mount

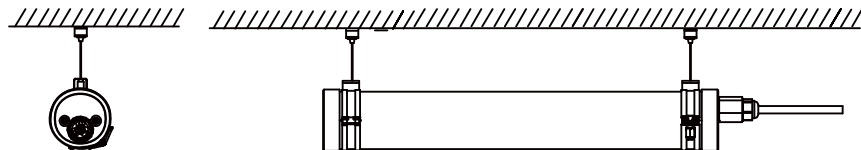

Specifications

Product Code	TBL92F-20W-T	TBL94F-40W-T	TBL95F-50W-T	TBL95F-60W-T
Power	20W	40W	50W	60W
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)			
Input Current	0.09A@220VAC	0.19A@220VAC	0.23A@220VAC	0.28A@220VAC
PF	0.90@220VAC			
Function Optional	0-10V / DALI / Sensor / Emergency			
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K			
Luminous Flux	2600Lm	5200Lm	6500Lm	7800Lm
Efficiency	130Lm/W±5% (Ra>80)			
LED Brand	Lumileds / Hongli 2835			
Driver Brand	BOKE			
Beam Angle	120°			
Operation Temp	-20°C~+40°C			
Storage Temp	-20°C~+60°C			
Life Span	Ta 40°C L70>54000 hours			
IP Class	IP67 & IP69K			
IK Class	PMMA IK08 / PC IK10			
Certificate	CE, RoHS, IK10, IP69K			
Lamp Body Color	Milky PC / PMMA housing & 304 / 316 stainless steel end caps			
Product Size (mm)	Ø75*552	Ø75*1152	Ø75*1452	Ø75*1452
Packing Size (mm)	730*260*260	1330*260*180	1630*260*180	1630*260*180
Quantity / Carton	9PCS	6PCS	6PCS	6PCS
Gross Weight (kg) ±0.3	9.6	13.4	14	14
Installation Mode	Surface mount / Suspension mount			